


### Features

#### Fresh Mix Dispenser

- Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6 grams of powder per second).
- Lighted front graphics for merchandising are easy to exchange; cappuccino or soup.
- Attractive high-impact resin door is dent and scratch resistant.
- Large easy-to-fill translucent hoppers hold 4 lbs. of product each, insuring quick and timely refilling.
- High speed heavy-duty whipper for complete product mixing.
- Improved automatic rinsing of whipper reduces run-on after beverage is dispensed.
- Adjustable legs and drip tray accommodate 20 oz. mugs easily.
- Electrical and plumbing components easily accessible through front and top.
- International electrical configurations available.

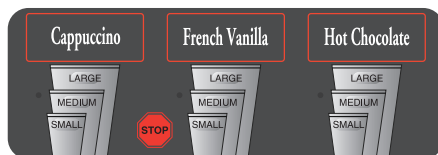

#### FMD DBC Dispenser

- Easy-to-program, one-touch portion control for 3 cup sizes.
- Fast fill perfect for quick service restaurants.
- Each mixing chamber has independent powder to water ratio.
- System setup is password protected for safety.
- Simple setup and hopper throw calibration system.



FMDS-3  
front display  
panel



Model FMD-3\*

Dimensions: 30"H x 11.3"W x 23.3"D



Model FMD DBC-3

Dimensions: 30"H x 11.3"W x 23.3"D

\* International models may vary in appearance.

ITEM#

PROJECT

DATE

International  
Model

FMDA-3

Model

FMD-3  
FMDS-3  
FMD DBC-3

## BUNN®

**Corporate Offices**  
1400 Stevenson Drive  
Springfield, Illinois 62703

**Phone**  
800-637-8606  
217-529-6601

**Fax**  
217-529-6644

**Technical Services**  
800-286-6070

**Internet**  
<http://www.bunnomatic.com>

**Western Regional Office**  
16431 Carmenita Road,  
Cerritos, California 90701

**Phone**  
562-926-0764  
**Fax**  
562-926-0858

**Canadian Office**  
280 Industrial Parkway South  
Aurora, Ontario, L4G 3T9

**Phone**  
905-841-2866  
**Fax**  
905-841-2775

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Patents  
Apply



## Dimensions & Specifications


Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Capacity	Cu. Ft.	Shipping Weight	Cord Attached
FMD-3 BLK	28200.0000	120	15	1700	1800	4.2 gal./hr.	8.4	86 lbs. (39.0 kg)	Yes
FMDS-3 BLK	28600.0000	120	15	1700	1800	4.2 gal./hr.	8.3	84 lbs. (38.1 kg)	Yes
FMD DBC-3 BLK	29250.0000	120	15	1700	1800	4.2 gal./hr.	8.3	85 lbs. (38.6 kg)	Yes

Door Conversion Kit—From model HC (black decor only) to model FMD door - 28613.0000

Note: SS=stainless steel cabinet with black door; BLK=black decor.

Electrical: 120V model requires 2-wires plus ground service rated 120V, single phase, 60 hz. 120/240V model requires 3-wires plus ground service rated 120/208 or 120/240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa) from a 3/8" (10 mm) or larger supply line. A shut-off valve should be installed in the line before the unit. Install a regulator in line when pressure is greater than 90 psi to reduce it to 50 psi. Supplied with 1/4" (6.4 mm) male flare fitting.

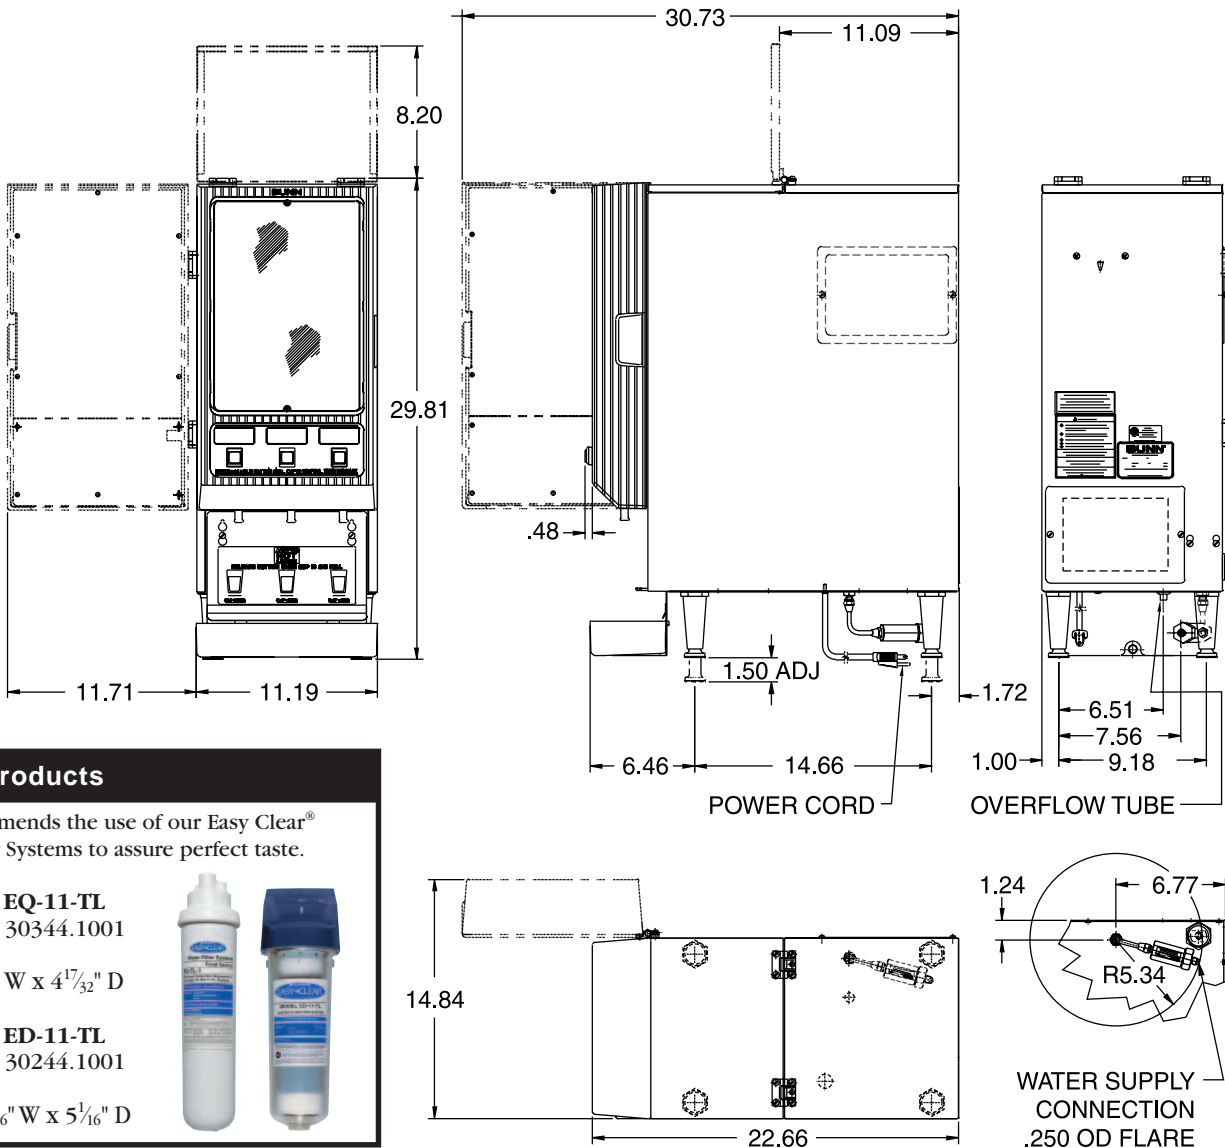

### Related Products

BUNN recommends the use of our Easy Clear® Water Quality Systems to assure perfect taste.

**Easy Clear® EQ-11-TL**  
 Product No. : 30344.1001  
 Dimensions:  
 15 7/8" H x 3 5/8" W x 4 17/32" D



**Easy Clear® ED-11-TL**  
 Product No. : 30244.1001  
 Dimensions:  
 14 3/16" H x 5 1/16" W x 5 1/16" D